Tube, centrifuge, conical base, graduated

PYREX®

- Centrifuge tube with white enamel graduations
- Graduated 0 - 3ml in 0.1ml divisions and 3 - 10ml in 0.5ml divisions
- Manufactured from Pyrex® borosilicate glass
- Can be centrifuged up to 3000 RCF values

Product Code	Capacity (ml)	Highest mark (ml)	Diam. (mm)	Length (mm)	Pack qty.
3460/02M	12	10	17	110	40

Tube, centrifuge, conical base, plain

PYREX®

- Manufactured from chemically inert Pyrex® glass for contamination-free performance
- Conical shape with rim
- Can be centrifuged up to 3000 RCF values

Product Code	Capacity (ml)	Diam. (mm)	Length (mm)	Pack qty.
1680/02M	12	17	110	40



Always examine centfrifuge tubes before use. Do not use if scratched, chipped or abraded.

Tube, centrifuge, ground socket


PYREX QUICKFIT U.K.®

- Borosilicate glass with precision-ground Quickfit socket to accept tapered stopper
- Conical or cylindrical shape
- Each tube is marked with its weight to the nearest 0.1g to enable tubes of similar weight to be selected from any batch
- Can be centrifuged at RCF values up to 3000

Product Code	Item code: glass stopper to fit	Shape	Joint size	Tube capacity (ml)	Tube O.D. x length mm	Pack qty.
BC24/C14T	2595/03M	Conical	14/15	10	17 x 115	10
BC24/C24R	2595/06M	Cylindrical	24/20	30	28.5 x 115	10

Tubes and stoppers should be ordered separately. Glass stoppers are listed on pages 256-258.



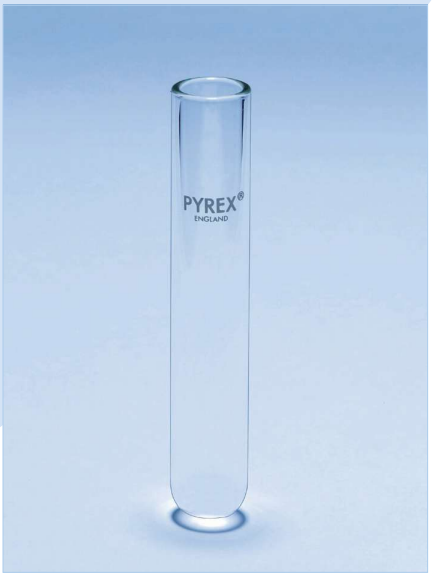

Tubes, centrifuge, cylindrical type

PYREX®

- Cylindrical type, round base
- Uniform glass distribution in wall and base for improved strength
- Manufactured from chemically resistant Pyrex® glass
- Can be centrifuged at RCF values up to 3000

Product Code	Capacity (ml)	O.D. (mm)	Length (mm)	Pack qty.
1660/02M	10	16	90	40
1660/06M	25	24	90	40
1660/08M	45	30	90	40

Always examine tubes before use. Do not use if scratched, chipped or abraded.



Tube, centrifuge, pear shape, ASTM

PYREX®

- Complies with ASTM D96 and D-1966
- For the determination of water and sediment in petroleum products
- Graduated in white enamel:
  - Lower stem graduated 0 to 1.5ml in 0.1ml divisions
  - Upper body graduated 1.5 to 5ml in 0.5ml divisions and from 5 to 10ml in 1ml

Product Code	Capacity (ml)	Approx overall length (mm)	Neck I.D. (mm)	Pack qty.
3440/02M	100	157	17	2



Tube, centrifuge, conical, ASTM

PYREX®

- Complies with ASTM D96, D91, D-893 and D-1796
- In accordance with standard methods of testing for water and sediment in petroleum products
- Manufactured from chemically resistant Pyrex® borosilicate glass

Product Code	Capacity (ml)	Approx overall length (mm)	Neck I.D. (mm)	Pack qty.
3450/02MP	100	200	17	2

email: info@scilabware.com